


ENVIZIO PRO WITH GPS AND GRANULAR PRODUCT CONTROL

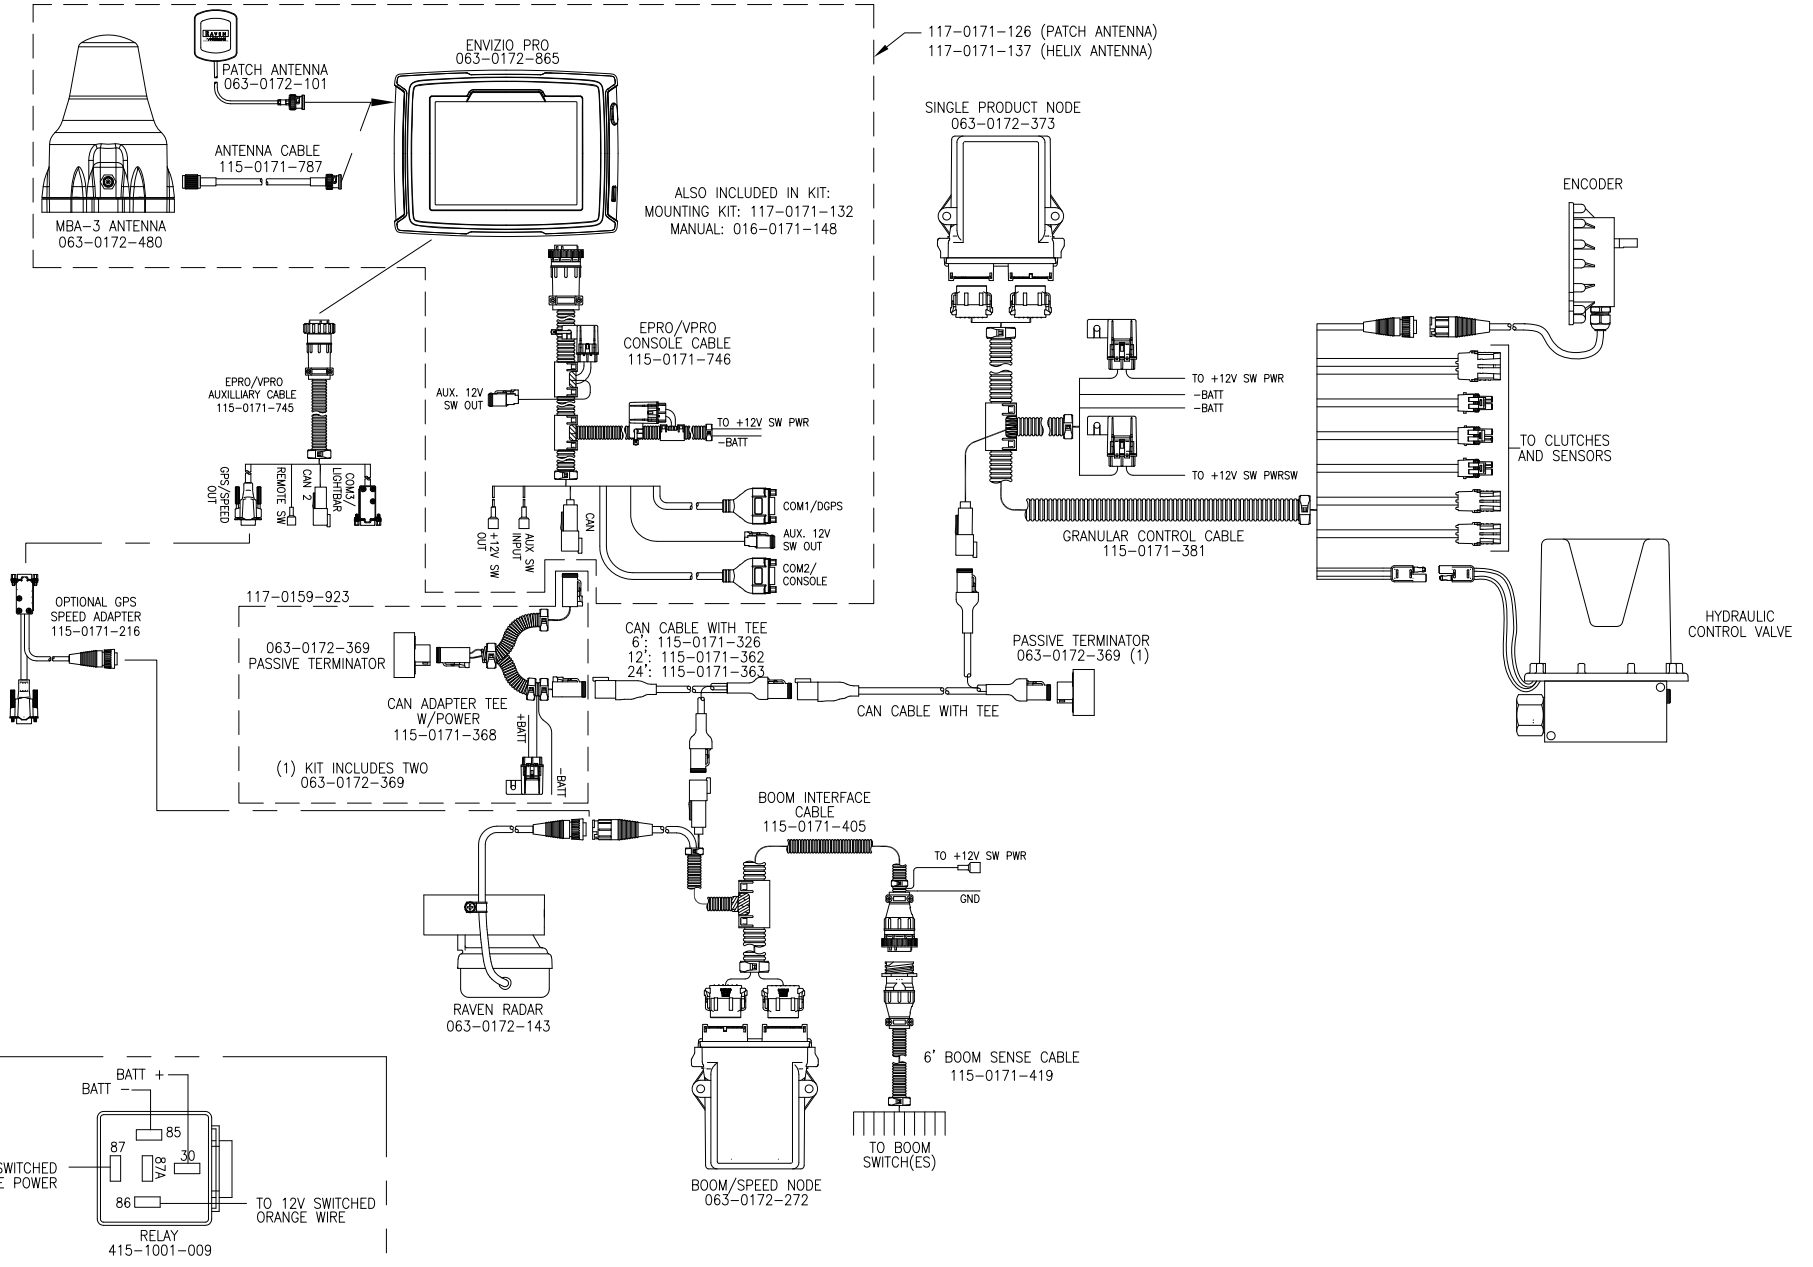

LOGIC POWER TO THE CAN NODES MUST BE SUPPLIED FROM A CLEAN POWER SOURCE (PREFERABLY THE VEHICLE BATTERY) AND MUST BE SWITCHED. IT IS RECOMMENDED THAT A RELAY, SIMILAR TO THE ONE SHOWN ABOVE BE USED FOR SWITCHING LOGIC POWER.

ECO NO.	PROD. MGR.	SERV. MGR.	PROD. CHAMP.	ENG.	DRAFT.	REV.	DRAWING NO.
E13313	SSS	TAC	EM	LAA1	LAA1	A	054-2000-004
E14844	SSS	TAC	EM	LAA1	MAP	B	-