


# Cellular Setup Guide - Raven RS1 with 2G/3G Modem

## SIM Card Installation

1. Visit the desired cellular service provider to purchase and activate a SIM card. RS1 2G/3G can support two SIM cards if more than one cellular provider is required.
2. Remove the RS1 from the cab roof.
3. Locate and remove the SIM card access door on the bottom of the RS1.

**Note:** It may be necessary to remove the mounting plate to access the SIM card access door.


FIGURE 1. SIM Card Access Door

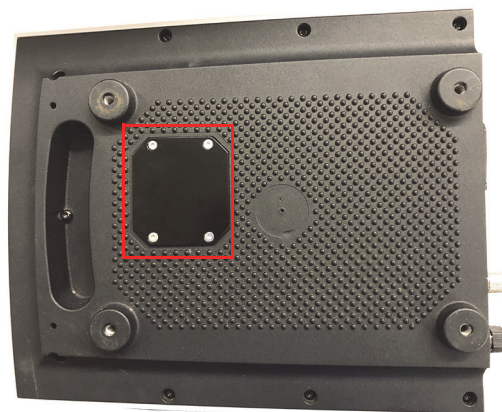

4. Insert a SIM card into the card slot.

**Note:** Note which slot the SIM card(s) was inserted in. This information is necessary for RS1 configuration later. The J11 slot corresponds to SIM card #1 in the Slingshot object pool. The J20 slot corresponds to SIM card #2 in the Slingshot object pool.

FIGURE 2. SIM Card Slots

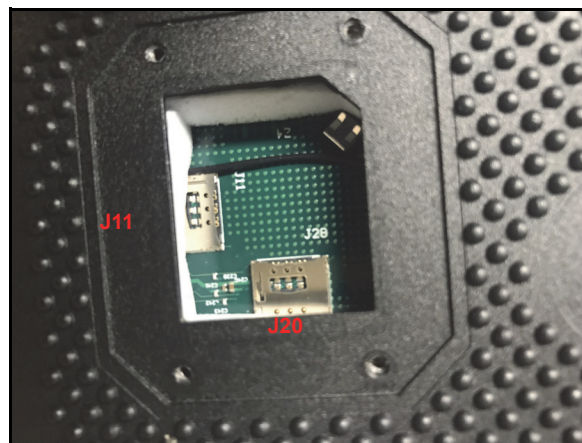

5. Reinstall the access door and torque the screws to 6.5 to 7.5 in-lbs (0.73 to 0.85 N-m).
6. Reinstall the RS1 on the cab roof.