

# Enable Rocker Switch Installation

## Console or Accessory Panel Installation

1. Locate an unused switch port.

**FIGURE 1. Removing Switch Port Cover**



2. Remove the cover of the unused switch port.

**FIGURE 2. Enable Rocker Switch Installed**




3. Route the connector and cable through the opening.
4. Snap the rocker switch into the switch port, ensuring it is secure and fully seated.
5. Connect the cable connector to the mating connector on the node harness.

---

## *Accessory Switch Plastic Housing Installation*

**FIGURE 3. Housing Assembled**

---

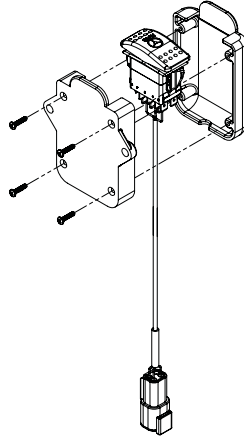

1. Position the two halves of the plastic housing around the switch, ensuring the cable connection is routed through the opening in the bottom of the housing assembly.
2. Secure the two halves of the housing using the four supplied screws.
3. Verify that the orientation of the switch in the housing is correct, then snap the switch into the housing.
4. Mount the housing in the desired location using fasteners or double-sided tape (not supplied).
5. Connect the cable connector to the mating connector on the node harness.