
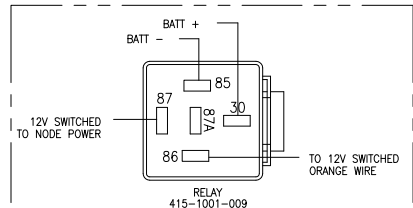


VIPER PRO WITH LIQUID CONTROL AND CAN ACCUBOOM

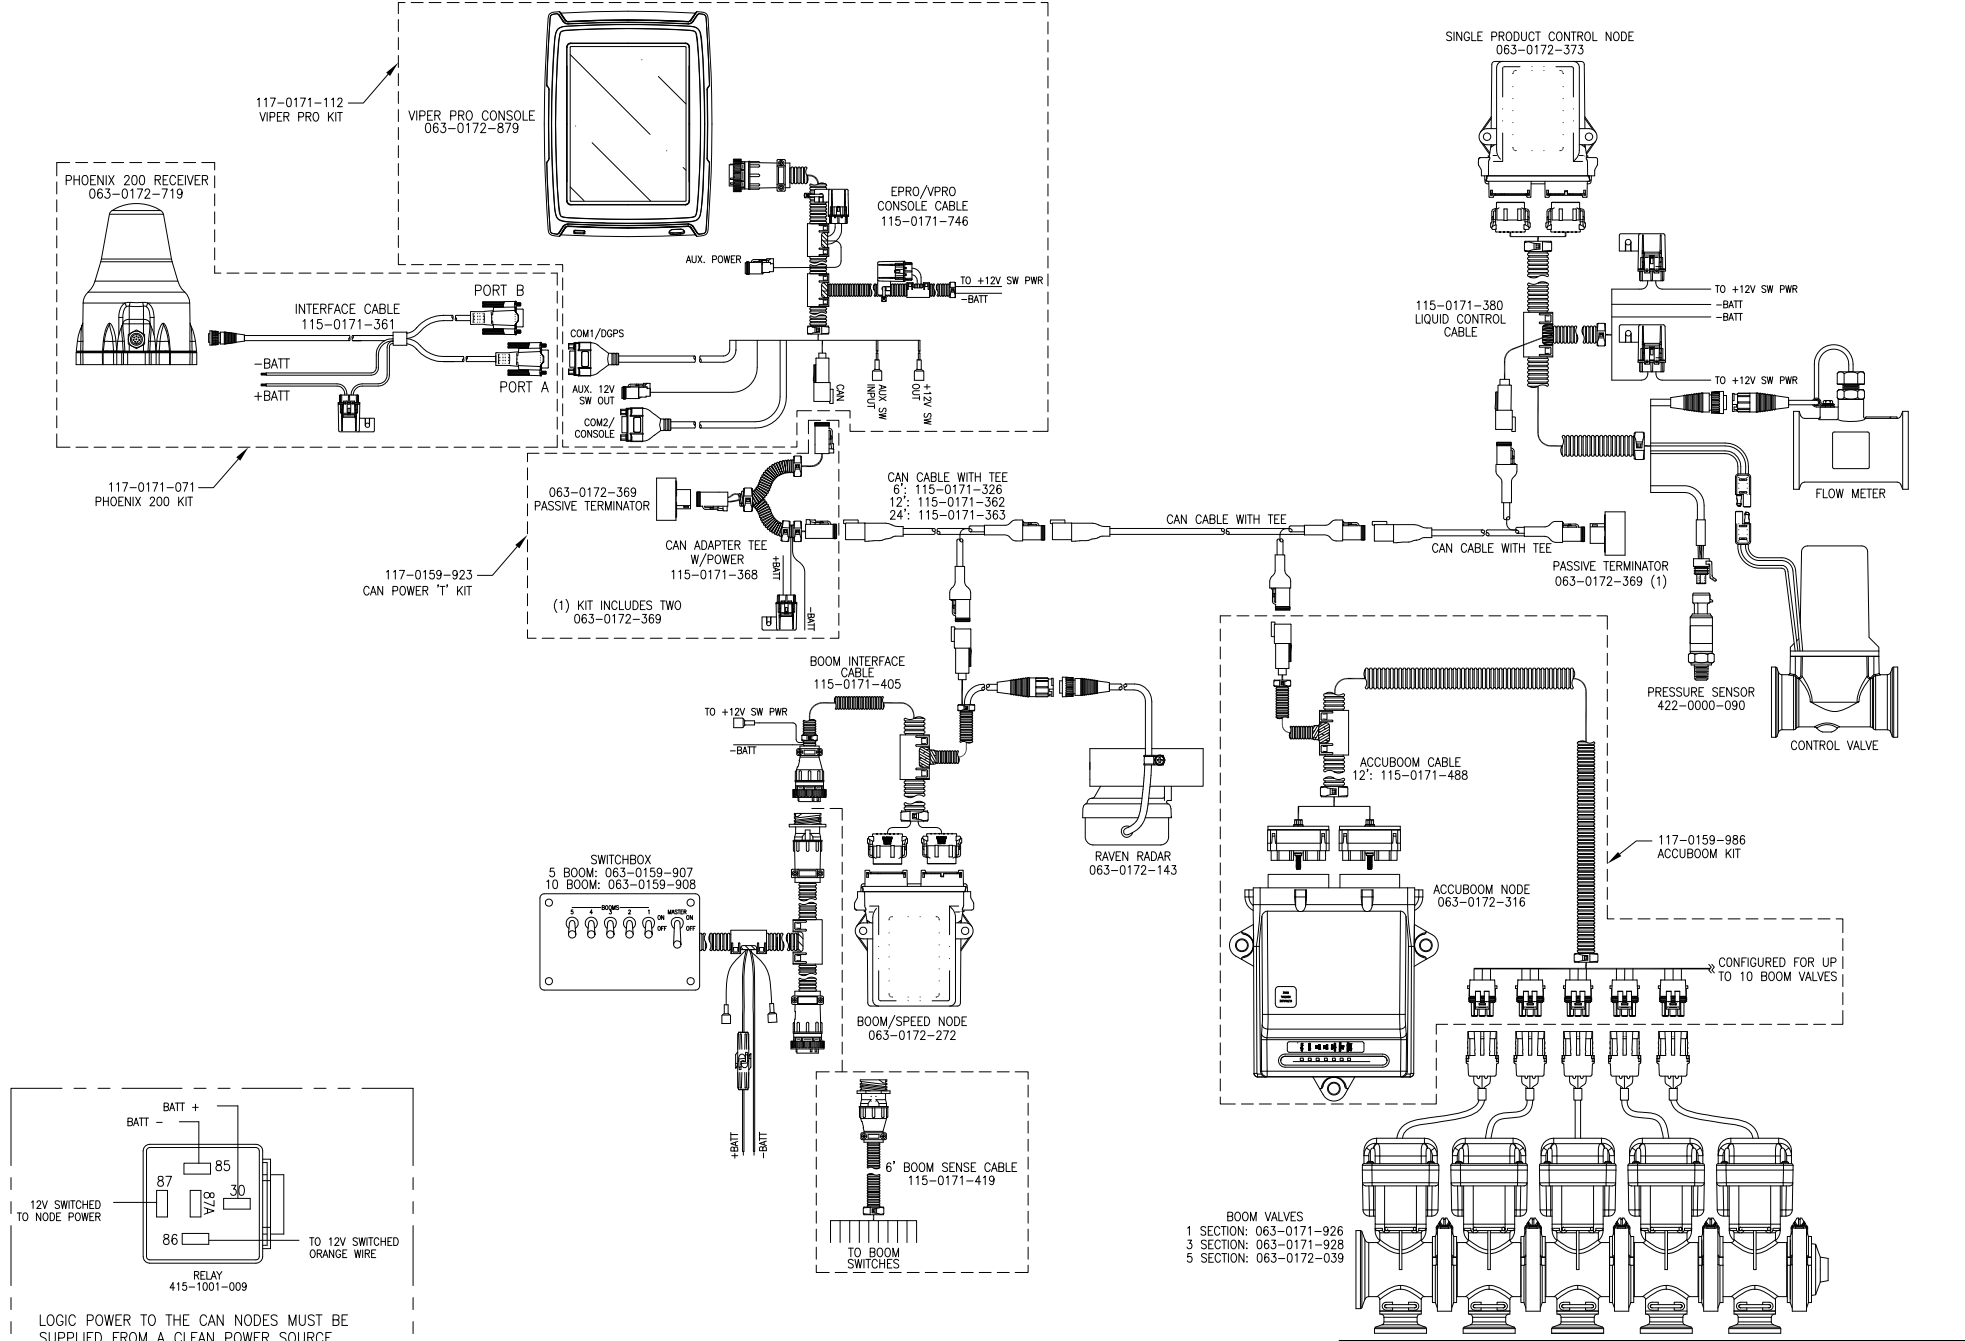

LOGIC POWER TO THE CAN NODES MUST BE SUPPLIED FROM A CLEAN POWER SOURCE (PREFERABLY THE VEHICLE BATTERY) AND MUST BE SWITCHED. IT IS RECOMMENDED THAT A RELAY, SIMILAR TO THE ONE SHOWN ABOVE BE USED FOR SWITCHING LOGIC POWER.

ECO NO.	PROD. MGR.	SERV. MGR.	PROD. CHAMP.	ENG.	DRAFT.	REV.	DRAWING NO.
E13431	TPH	TAC	EM	JCP	LAA1	A	054-2130-003