VIPER PRO WITH PHOENIX 200 AND SINGLE PRODUCT LIQUID CONTROL

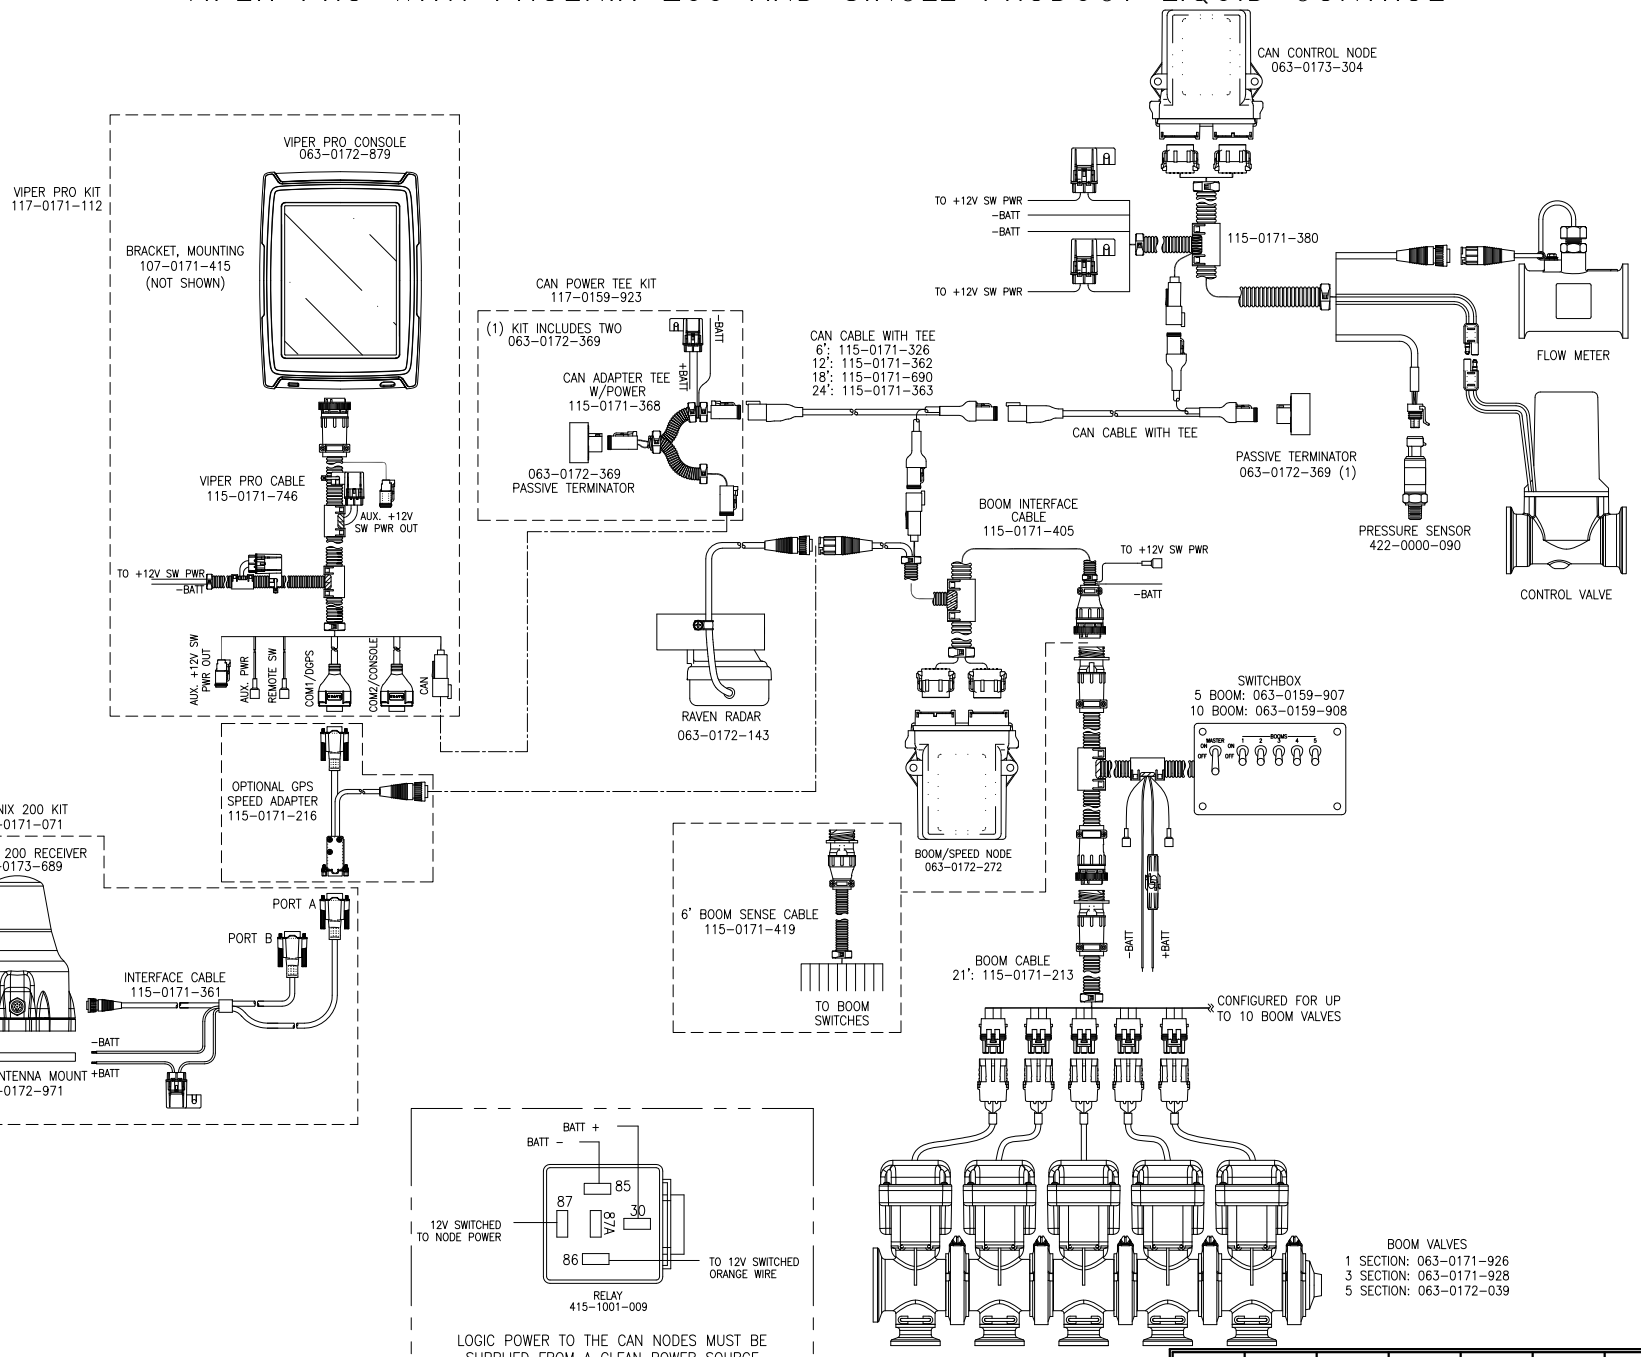

LOGIC POWER TO THE CAN NODES MUST BE SUPPLIED FROM A CLEAN POWER SOURCE (PREFERRABLY THE VEHICLE BATTERY) AND MUST BE SWITCHED. IT IS RECOMMENDED THAT A RELAY, SIMILAR TO THE ONE SHOWN ABOVE BE USED FOR SWITCHING LOGIC POWER.

ECO NO.	PROD. MGR.	SERV. MGR.	PROD. CHAMP.	ENG.	DRAFT.	REV.	DRAWING NO.
E13330	SSS	TAC	RJD	LAA1	MAP	A	054-2140-003
E24095	GLE	–	SAH	CRM	JJP	B	054-2140-003